

**HYDRAULIC CONTINUOUS TENSION WINCH
 TYPE TR 2500**

WINCH TR 2500 :

- Trailer 750 Kgs
 - Metallic frame
 - Dual hinge drawbar
 - Electric road lights
 - Gasoline engine HONDA 11HP with electrical starter
 - Variable flow hydraulic pump
 - Selector winding/unwinding
 - Double capstans
 - Unwinding speed 0 to 120 meter/minute
 - Pulling force 0 to 2 500 Kgs
 - Cable dia 7.5 mm, Length 630 m, breaking force 4 300 kgs
 - Pulling speed 0 to 40 m/min
 - Hydraulic motor and clutch on storage drum
 - Special device for automatic cable winding
 - Two manual outriggers
 - Orientable pulley
 - Aluminium protection structure
 - Hydraulic tool power takeoffs
 - Safety device if protections no used
 - Tools box
- DYNAMOMETER TYPE HEP.i DC 2.5**
 to program and stop pulling when maximum force is reached

OPTION HYDRAULIC TOOLS

- Submersible pump
- Cable cutter




WINCH TR 2500



OPENED PROTECTION STRUCTURE



PROTECTION IN WORKING POSITION

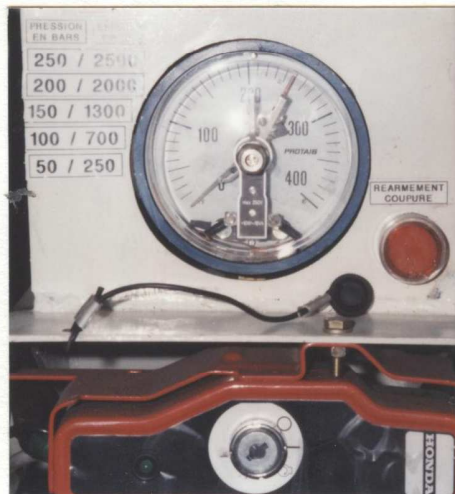

**DYNAMOMETEUR
 HEP.i DC2.5**



**SUBMERSIBLE PUMP
 (OPTION)**



